

Digital Caliper MarCal 16 EWRI



REFERENCE




Features

Functions:


ON/OFF
 RESET (Set display to zero)
 mm/inch
 PRESET (for entering a numerical value)
 Reference-Lock/Unlock
 Hold
 DATA
 Auto-ON/OFF

- Integrated Wireless data transmission
- Immediate measurement due to the Reference system
- Excellent resistance against dust, coolants and lubricants, protection class IP67
- Dirt wipers are integrated in the slide
- Life of the battery up to 3 years
- Max measuring speed 2,5 m/s (100"/s)
- High contrast LCD with 11 mm high digits
- Lapped guide way
- Slide and beam made of hardened stainless steel
- Measuring blades for inside measurement
- Step measuring function
- Locking screw
- Supplied with: Case, battery, operating instructions

Technical Data

Measuring range		Resolution	Error limit G		Depth rod		Friction wheel	Order no.
mm	(inch)	mm/inch	mm	/ inch	DIN 862			
150	(6")	0.01/ .0005"	0.03	/ .001"	●	●		4103400
150	(6")	0.01/ .0005"	0.03	/ .001"	●	●	●	4103401
150	(6")	0.01/ .0005"	0.03	/ .001"	●		●	4103402
150	(6")	0.01/ .0005"	0.03	/ .001"	●		●	4103403
200	(8")	0.01/ .0005"	0.03	/ .001"	●	●		4103404
200	(8")	0.01/ .0005"	0.03	/ .001"	●	●	●	4103405
300	(12")	0.01/ .0005"	0.04	/ .0015"				4103406
300	(12")	0.01/ .0005"	0.04	/ .0015"			●	4103407

Technical Data

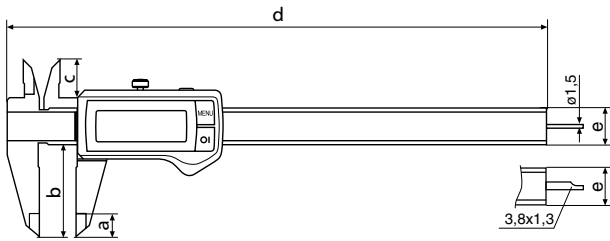

Dimensions

mm	a	b	c	d	e
150	10	40	16	235	16 x 3
200	10	50	19	285	16 x 3.5
300	14	64	19	388	16 x 4

Accessories

		Order no.
Depth Measuring Bridge	16 Em	4102020
Battery 3V, Type CR 2032		4102520
i-Stick wireless receiver incl. MarCom Standard		4102220
Software MarCom Professional 4.0		4102552
Software MarCom Standard 3.1		4102551

Accessories for Data Processing see Chapter 11

16 Em

