

Digital Depth Gage MarCal 30 ER



REFERENCE

Features

Functions:


ON/OFF
 RESET (Set display to zero)
 mm/inch
 PRESET (enter a numerical value)
 Reference-Lock/Unlock
 DATA (Data transmission via connection cable)
 Auto-ON/OFF

- Immediate measurement due to the Reference system
- MarConnect data output, choose alternatively: USB, OPTO RS232C or Digimatic
- Dirt wipers are integrated in the slide
- Life of the battery up to 3 years
- Max measuring speed 2.5 m/s (100"/s)
- High contrast LCD with 8.5 mm high digits
- Lapped guide way
- Beam and cross beam are made of hardened stainless steel
- Locking screw

• Supplied with:
 Case, battery, operating instructions

Technical Data


Measuring range		Resolution	Error limit	Order no.
mm	(inch)	mm / inch	G mm	
150	(6")	0.01 / .0005"	0.03	4126514
300	(12")	0.01 / .0005"	0.04	4126515
500	(20")	0.01 / .0005"	0.05	4126516

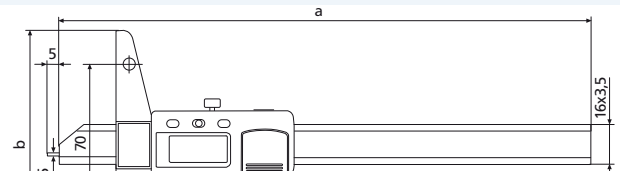


Dimensions

mm	a	b
150	234	100
300	384	150
500	584	150

Depth measurement

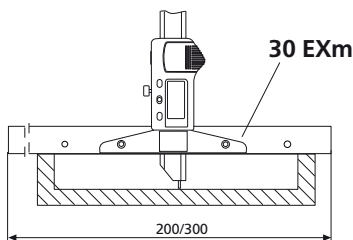

Distance measurement

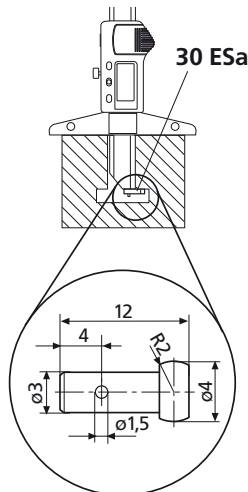

Accessories

	Order no.
Battery 3V, Type CR 2032	4102520
Data Connection Cable USB (2 m)	16 EXu 4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411
Cross Beam Extension 200 mm	30 EXm 4126511
300 mm	30 EXm 4126510
Anvil for distance measurement to be fixed to the measuring pin	30 ESa 4125611

Accessories for Data Processing see Chapter 11