


Inside Micrometer Micromar 44 Cms Set

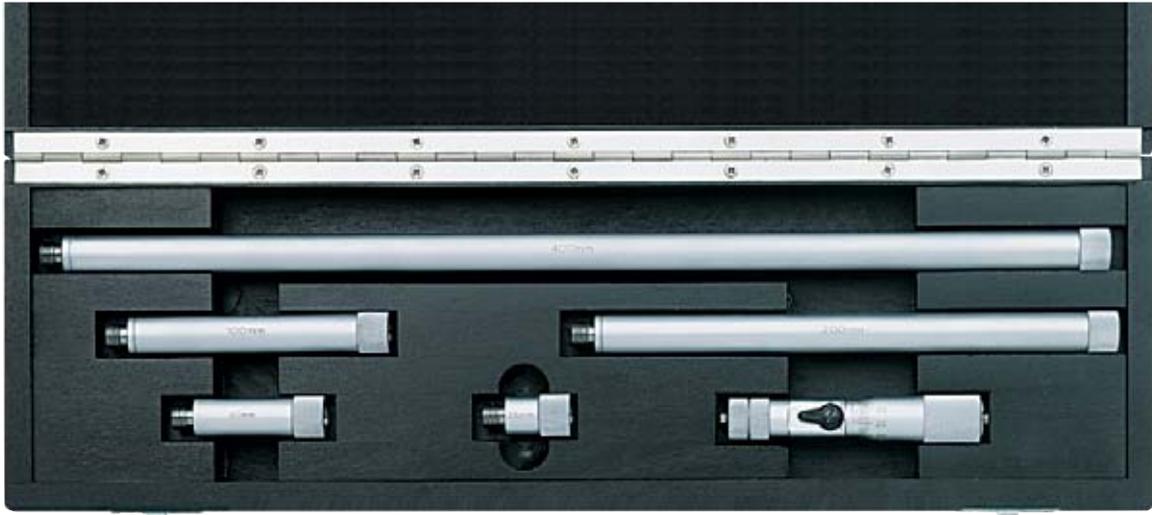


Features

- Rigid, lightweight tubular construction
 - Spindle is hardened throughout and ground
 - Locking lever
 - Scales with satin-chrome finish
 - Carbide tipped spherical measuring faces
 - Interchangeable extensions 44 Cv with cylindrical gage rods that are spring-mounted in protective sleeves; for the extension of the measuring range
 - Protection sleeves have a satin chrome finish
- Span of error**
Basic unit 5 μm
- Basic unit in combination with any of the extensions
 $4 \mu\text{m} + 10 \times 10^{-6} \times l$
 (l = length of the combination in mm)
- Supplied with: Case

Technical Data

Catalog no.	Measuring range		Measuring head 44 Cm		Extensions 44 Cv length in mm	Order no.
	mm		Readings	Spindle thread pitch		
			mm	mm		
44 Cms1	100	- 150	0.01	0.5	25	4168020
44 Cms2	100	- 300			25 / 50 / 100	4168021
44 Cms3	100	- 500			25 / 50 / 100 / 200	4168022
44 Cms4	100	- 900*			25 / 50 / 100 / 200 / 400	4168023

* up to 2500 mm can be achieved with 2 extensions: 44 Cv 800 mm

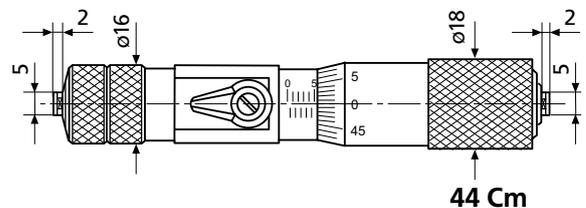

Accessories

Inside Micrometers, ring gages, etc. please refer to page 3-30